HL-SC2102 液压式单杆双向阻尼滑轮
Hydraulic both-way soft close sliding door roller

功能特性 Features

- 适用于单扇或多扇平移门
  Suitable for single or multiple sliding doors
- 适用于家庭、酒店、写字楼等场所使用的缓冲平移门
  Suitable for sliding doors for families, hotels, office buildings, etc.
- 平衡轮设计原理
  Balance wheel design principle
- 受力均匀，开关门双向缓冲
  Double soft closing system for sliding door balance running
- 手动推拉、两边定位、高低调节
  Manual push and pull positioning on both sides to achieve balance
- 安装方便、运行顺畅、使用寿命长
  Easy installation, smooth operation, long service life

材质及表面处理 Materials and finishes

- 导轨：铝合金，阳极氧化
  Sliding track : Aluminum,Anodized
- 吊轮：锌合金， 珍珠铬
  Hanging roller : Zinc alloy,PC
- 吊码：铁，镍
  Bracket : Iron,SN
- 插片：铜，砂镍
  Insert : Brass,SN
- 窄边吊码：铝合金
  Bracket : Aluminum
- 玻璃夹：铝合金
  Glass clamp : Aluminum

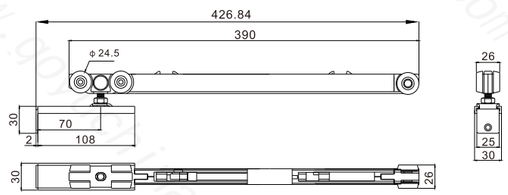

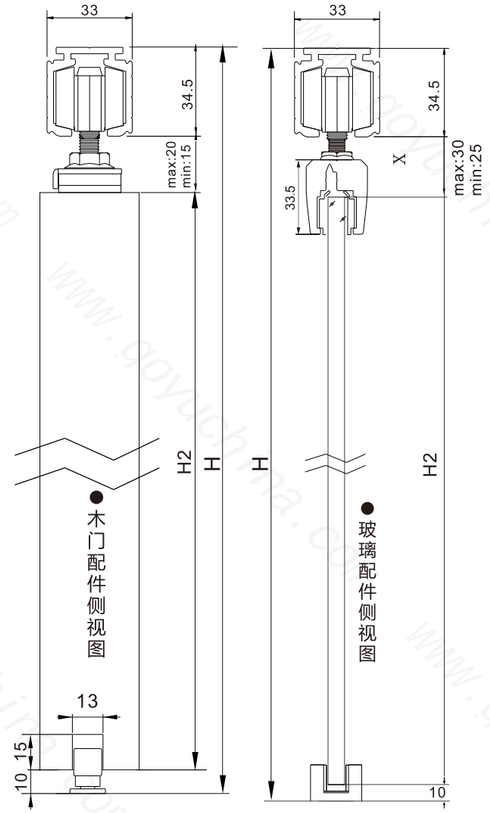

※ 产品色彩以实物为准

标准配置 Standard configuration



缓冲吊轮
Hanging roller
1个 / pcs

吊轮
Hanging roller
1个 / pcs

阻尼限位器
Triggers
2个 / pcs

QH-1328轨道
Upper track
1个 / pcs

选配配件 Optional accessories

吊码
Bracket
2个 / pcs

插片
Insert
2个 / pcs

窄边吊码
Bracket
2个 / pcs

玻璃夹
Glass clamp
2个 / pcs

快装吊码
Glass clamp
2个 / pcs

平装插片
Insert
2个 / pcs

选配地导 Optional bottom guide

地导CG0483
Bottom guide
1个 / pcs

地导CG0895
Bottom guide
1个 / pcs

地导CG0169
Bottom guide
1个 / pcs

QH-1308底轨
Upper track
1个 / pcs

产品参数 Product parameters

产品型号 Item NO.	HL-SC2102-01 吊码 Bracket	HL-SC2102-02 插片 Insert	HL-SC2102-03 玻璃夹 Glass clamp	HL-SC2102-04 窄边吊码 Bracket	HL-SC2102-05 快装吊码 Bracket	HL-SC2102-06 平装插片 Insert
承重(KG) MAX Capacity	80	80	80	80	80	80
适用厚度(mm) Door thickness	≥25	≥30	8~10	45	≥20	≥25
门扇宽度(mm) Door width	≥485	≥540	≥515	≥570	≥516	≥850
门高公式(H2) Door height formula	H-34.5-X-10mm					

※ 产品色彩以实物为准